

Fingerprint Time Attendance & Access Control with Battery

RONALD JACK X628C



Card Report											
Card	Name	Position	Dept	Emp No	Card No	Card Type	Card Status	Card Issue Date	Card Expiry Date	Card Validity	Card Remarks
001	John Doe	Manager	HR	1001	123456	IC	Active	2023-01-01	2024-12-31	Valid	
002	Jane Smith	Employee	IT	1002	234567	IC	Active	2023-01-01	2024-12-31	Valid	
003	Mike Johnson	Employee	IT	1003	345678	IC	Active	2023-01-01	2024-12-31	Valid	
004	Sarah Lee	Employee	IT	1004	456789	IC	Active	2023-01-01	2024-12-31	Valid	
005	David Kim	Employee	IT	1005	567890	IC	Active	2023-01-01	2024-12-31	Valid	

Attendance Report											
Emp No	Emp Name	Dept	Position	Card No	Card Type	Card Status	Card Issue Date	Card Expiry Date	Card Validity	Card Remarks	Attendance
1001	John Doe	HR	Manager	123456	IC	Active	2023-01-01	2024-12-31	Valid		10:00
1002	Jane Smith	IT	Employee	234567	IC	Active	2023-01-01	2024-12-31	Valid		09:30
1003	Mike Johnson	IT	Employee	345678	IC	Active	2023-01-01	2024-12-31	Valid		09:45
1004	Sarah Lee	IT	Employee	456789	IC	Active	2023-01-01	2024-12-31	Valid		09:15
1005	David Kim	IT	Employee	567890	IC	Active	2023-01-01	2024-12-31	Valid		09:00



Features

- Fingerprint access control system with time attendance application
- Self-Service Report, it's easy to check employee entry time report
- Built-in relay, easy to connect with door lock and exit button
- Verification mode: fingerprint, ID card, Password
- 2.8 inch TFT color screen and friendly UI
- Voice prompt for fingerprint acceptance and rejection
- Can download SSR report from T8-A by USB flash disk
- Support many kinds of Schedule bell
- Support USB Host and TCP/IP



Workcode



Card



T9 input



SSR report



TCP/IP



USB host




Auto status



Schedule bell


Working Application

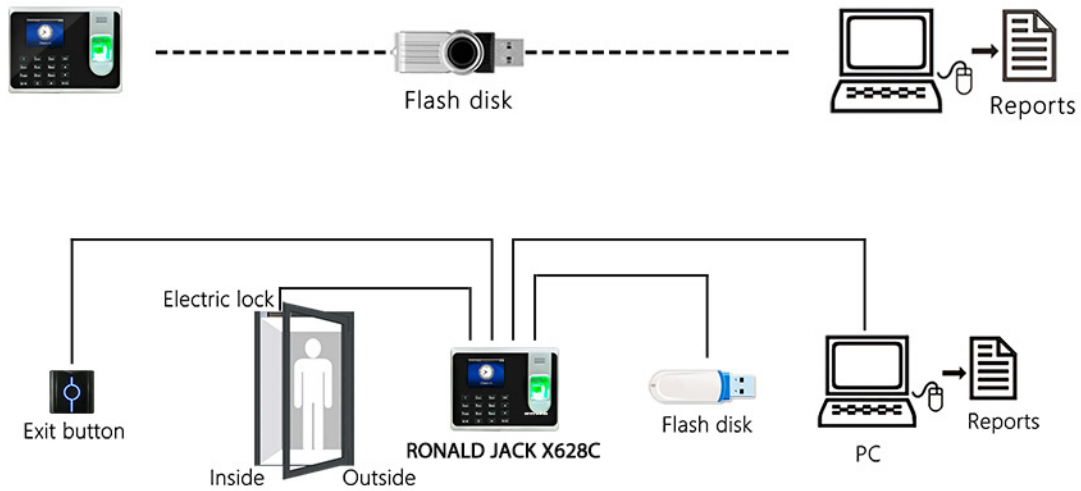


Specification

Model	RONALD JACK X628C
LCD Display	2.8 inch TFT color screen
Speaker	Voice prompt(language can be selected)
Capacity	Fingerprint: 3,000 Users:3,000 Card: 3,000 Transaction: 100,000
Verification	Verification speed (1:1) ≤ 0.5S Identification speed (1:1) ≤ 15
Identification	FRR ≤ 0.01% FAR ≤ 0.0001%
Communications	TCP/IP, USB Host
Power Supply	110/220 VAC-5VDC/1A
Language	English, Spanish, Arabic (other languages can be customized)
Environment	Operation temperature: 0°C-45°C Operation humidity: 20%-80%
Package data	Machine size: 185(L)*140(W)*30(H)mm Unit packing: 300*210*75cm Real weight: 0.75kg Volume weight: 1.2kg
Function support	ID card reader, Auto status, 9 PIN user ID, T9 input, Backup battery, ADMS Simple access control
Optional	SSR report (1,000 Users, 3,000 Fingerprint)

Package List




Device




Mounted plate



Screws



Software CD



Power adapter