

# 19" Widescreen LED Monitor

Great Performance at a Great Value

**VA1917a**



The ViewSonic® VA1917a is a widescreen monitor that delivers value and performance for both home offices and small businesses. Featuring a matte finish, this 19" monitor can fit on any desktop. Great for viewing office documents or surfing the web, the monitor's built-in color management ensures the most accurate white level for image rendering, allowing users to match different color temperature settings to create more comfortable working conditions. In addition, energy-saving Eco-mode reduces cost of ownership, making the VA1917a the best choice for both government and education customers as well.

## Key Features:

- 16:9 widescreen LED monitor with 1366x768 resolution
- sRGB color correction delivers true colors
- Environmentally friendly ENERGY STAR® and EPEAT-Silver certifications

Up to 35%\* in energy savings with ViewSonic exclusive Eco-mode feature



3-year limited warranty

## Designed for:

- Home offices
- Small business
- Government
- Education

# 19" Widescreen LED Monitor

**VA1917a**

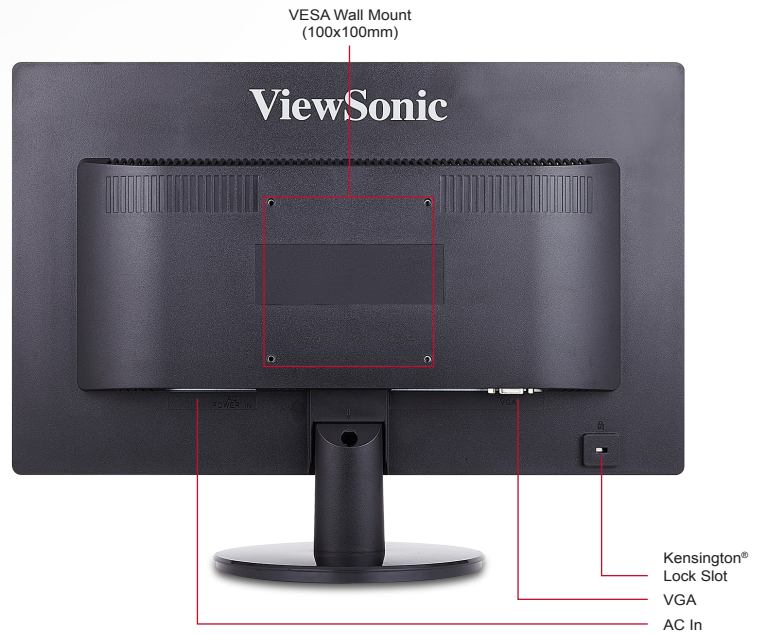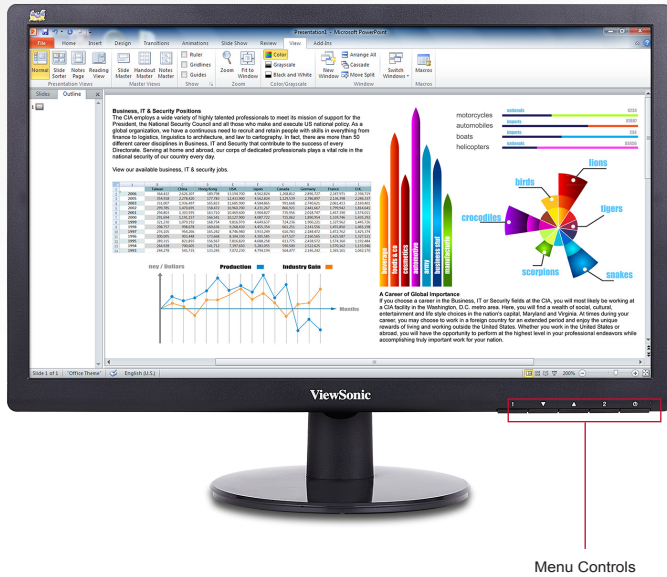

## Specifications

<b>LCD PANEL</b>	Type	Color a-Si TFT Active Matrix
	Display Area	16.1" horizontal x 9.1" vertical; 18.5" diagonal
	Optimum Resolution	1366x768
	Brightness	200 cd/m <sup>2</sup> (typ.)
	Contrast Ratio	600:1 (typ.)
	Viewing Angles	170° horizontal, 160° vertical
	Colors	16.7M
	Response Time	5ms (GTG)
	Backlight	White-light LED
	Backlight Life	30,000 hours (min.)
	Panel Surface	Anti-glare, hard-coating (3H)
<b>VIDEO INPUT</b>	Digital	VGA
	Frequency	Fh: 24~82kHz, Fv: 50~75Hz
	Sync	Separate Sync, Composite Sync, Sync on Green
<b>COMPATIBILITY</b>	PC	Up to 1366x768 non-interlaced
	Mac®	Up to 1366x768
<b>CONNECTOR</b>	Video In	VGA
	Power	Internal Power Board, 3-pin plug (CEE22)
<b>CONTROLS</b>	Front Panel Buttons	Power, 1, Up, Down, 2
	OSD	Auto Image Adjust, Contrast/Brightness, Input Select, Audio Adjust, Color Adjust, Information, Manual Image Adjust, Setup Menu, Memory Recall (See user guide for complete OSD functionality)

<b>ERGONOMICS</b>	Tilt	Forward 5° / Back 20°
<b>POWER</b>	Voltage	AC 100~240V (universal), 50 / 60Hz
	Consumption	18W (typ.) / 20W (max.)
	Optimize	15W (typ.)
	Conserve	12W (typ.)
<b>OPERATING CONDITIONS</b>	Temperature	32~104° F (0~40° C)
	Humidity	10~90% (non-condensing)
<b>DIMENSIONS (W x H x D)</b>	Physical with Stand	17.4 x 13.1 x 6.9 in. / 442.4 x 332.9 x 176 mm
	Physical without Stand	17.4 x 10.7 x 1.8 in. / 442.4 x 271.8 x 46.2 mm
	Packaging	19.4 x 13.7 x 4.3 in. / 493 x 348 x 110 mm
<b>WEIGHT</b>	Net with Stand	4.9 lb. / 2.2 kg
	Net without Stand	4.4 lb. / 2.0 kg
	Gross	6.4 lb. / 2.9 kg
<b>REGULATIONS</b>		WEEE, RoHS, CE, CB, UL/cUL, FCC-B, ENERGY STAR, EPEAT Silver
<b>RECYCLE/DISPOSAL</b>		Please dispose of in accordance with local, state, or federal laws
<b>WALL MOUNT</b>	VESA®	100 x 100 mm
<b>WARRANTY</b>		Three-year limited warranty on parts, labor and backlight

## What's in the box?

VA1917a display, Power cable, VGA cable, Quick Start Guide, ViewSonic Wizard CD (User Guide)



ViewSonic Corporation's QMS & EMS have been registered to ISO 9001 & ISO 14001, respectively, by TUV NORD.